


SL26 95" LL

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

NOTE: For 90-degree openings, please specify at time of order for no upcharge. There will be an upcharge for 90-degree ATW cover plates when ordered separately and clear or bronze must be specified.

SL26 Profile

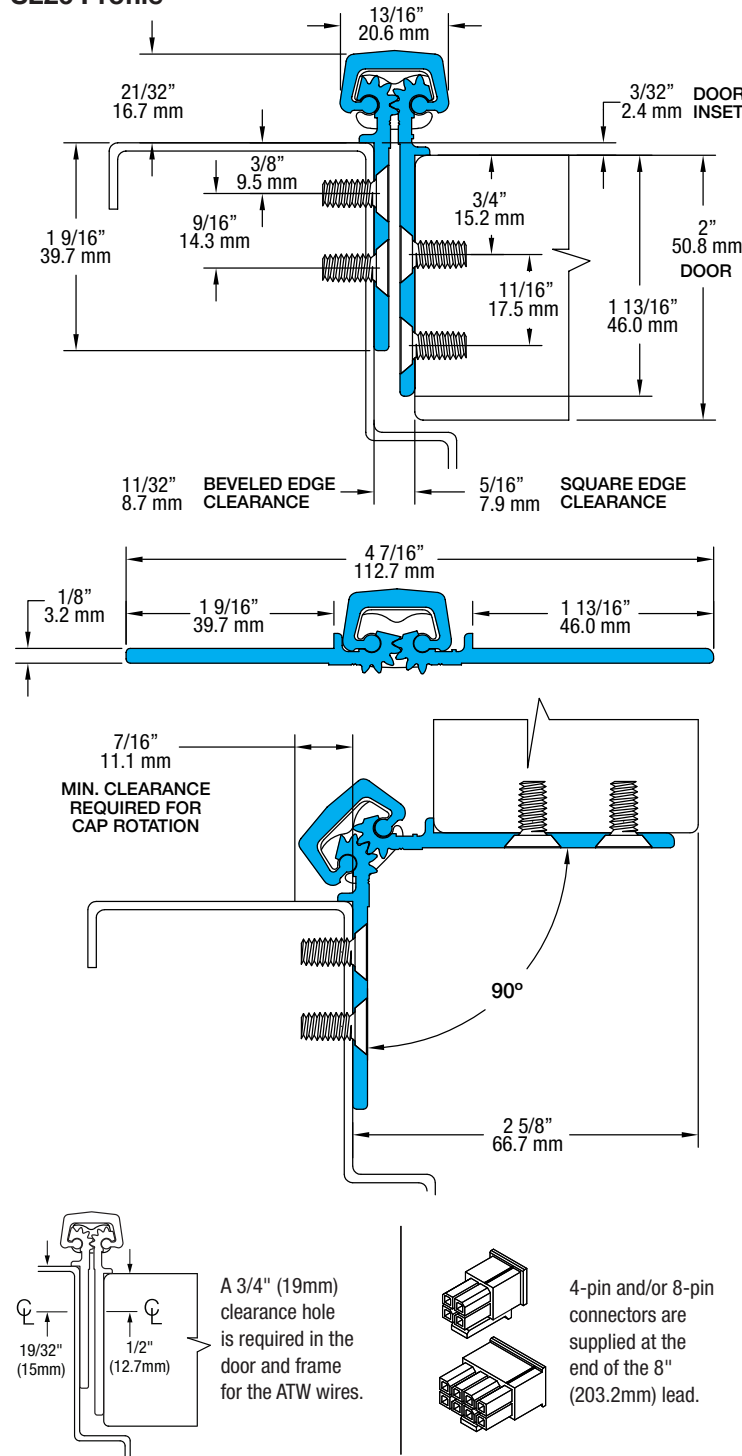

60 fasteners / 36 bearings

| HOLES | ATW LOCATIONS |
|-----------------|-----------------|
| 1 1/2 [38.1] | 0 [0] |
| 3 1/2 [88.9] | |
| 5 1/2 [139.7] | |
| 10 [254.0] | 11 5/8 [295.3] |
| 15 [381.0] | 16 3/4 [425.5] |
| 20 [508.0] | 21 7/8 [555.6] |
| 25 [635.0] | 27 [685.8] |
| 30 [762.0] | 32 1/8 [816.0] |
| 35 [889.0] | 37 1/4 [946.2] |
| 40 [1016.0] | |
| 43 3/4 [1111.3] | |
| 47 1/2 [1206.5] | |
| 51 1/4 [1301.8] | |
| 55 [1397.0] | 57 3/4 [1466.9] |
| 60 [1524.0] | 62 7/8 [1597.0] |
| 65 [1651.0] | 68 [1727.2] |
| 70 [1778.0] | 73 1/8 [1857.4] |
| 75 [1905.0] | 78 1/4 [1987.6] |
| 80 [2032.0] | 83 3/8 [2117.7] |
| 85 [2159.0] | |
| 89 1/2 [2273.3] | |
| 91 1/2 [2324.1] | |
| 93 1/2 [2374.9] | |
| | 95 [2413.0] |