




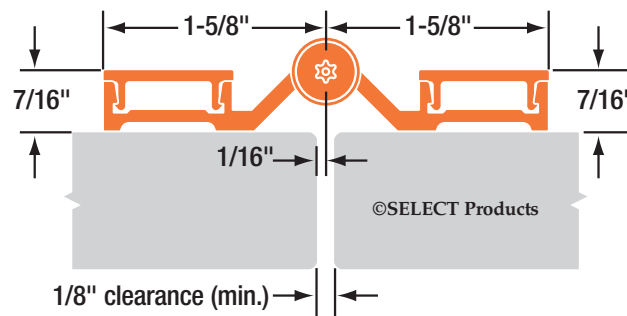

- Bright dip anodized aluminum
- Spring-loaded
- Max. door weight 80 lb.
- Safety lift feature available

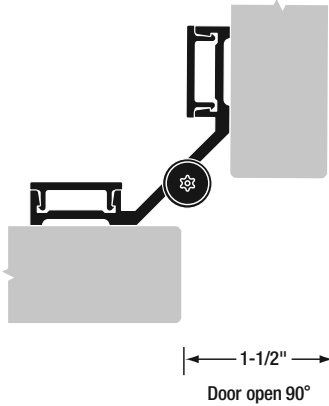

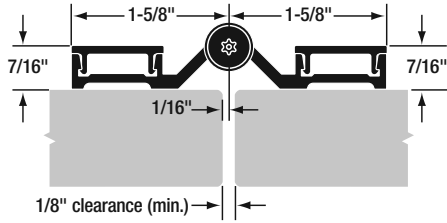

MATERIAL: 6463-T5 aluminum with .25" diameter 304 stainless pin and stainless steel spring mechanism. Long-life nylon split bearings.

LENGTHS: 54" and 57" lengths standard for nominal door heights. Custom lengths are available.

RATINGS: For doors 36" wide (max.) weighing up to 80 pounds without frame or door reinforcement.

FINISH: Bright dipped anodized.

ORDER: Specify if safety lift feature is required. Special lengths available: 24" minimum; 72" maximum. #14 x 3/4" Torx button head sheet metal screws are provided as a standard pack. One-way shoulder screws optional at extra cost.

SL402 HINGE SCREW COUNT		
HINGE LENGTH	DOOR SCREWS	FRAME SCREWS
54"	6	6
57"	6	6

SELECT Advantages



TEMPLATED HOLE PATTERN

Select hinges line up perfectly, precisely, every time. Makes installation easier and faster.



NYLON DOUBLE BEARINGS

Create a strong, free-moving assembly that allows closers and other door hardware to function properly.



VARIETY OF FINISHES

Available in polished, brushed and painted finishes to match, contrast or accent your building's design.



3-HR. FIRE RATING

Fire-rated out of the package. No extra parts to buy or install, no liability worries.



1/4-IN. STAINLESS STEEL ROD

Delivers high tensile strength by forming a strong, free-moving unit. Flexible and strong in abused openings.



ADJUSTA-SCREW™ FASTENERS

Remedy out-of-square doors and frames easily. Correct fit variances up to 3/8" along full length of door.



END CAPS

Spiral-knurled steel caps seal the barrel ends to contain hinge rod.

- SELECT pin & barrel continuous hinges are tested and listed by Underwriters Laboratories Inc. to standards UL10B, UL10C (positive pressure) and UBC7.2.

