


## SL24 85" LL

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

**NOTE:** For 90-degree openings, please specify at time of order for no upcharge. There will be an upcharge for 90-degree ATW cover plates when ordered separately and clear or bronze must be specified.

### SL24 Profile

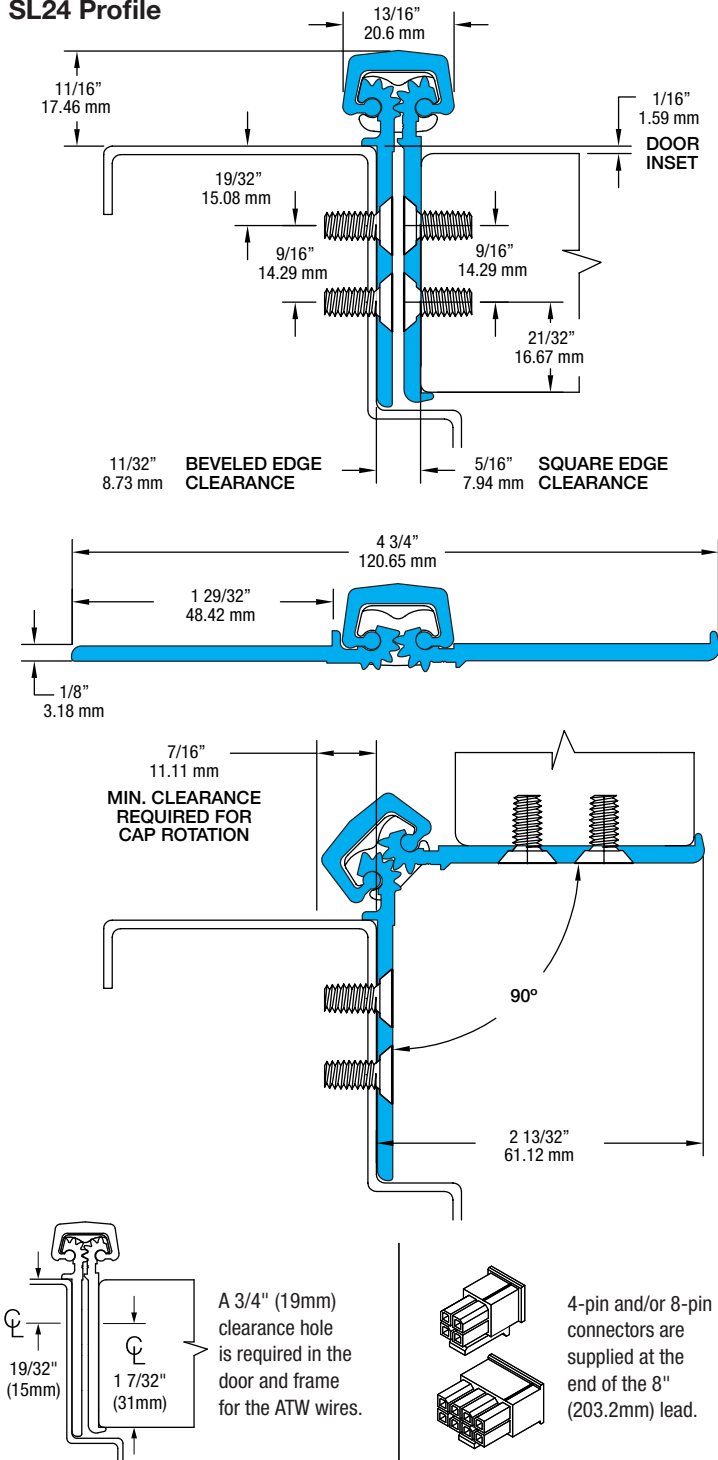

### 52 fasteners / 32 bearings

| HOLES           | ATW LOCATIONS     |
|-----------------|-------------------|
| 1 1/2 [38.1]    | 0 [0.0]           |
| 3 1/2 [88.9]    |                   |
| 5 1/2 [139.7]   |                   |
| 10 [254.0]      |                   |
| 20 [508.0]      | 11 3/4 [298.5]    |
|                 | 14 5/16 [363.5]   |
|                 | 16 7/8 [428.6]    |
| 30 [762.0]      | 22 [558.8]        |
|                 | 24 9/16 [623.9]   |
|                 | 27 1/8 [689.0]    |
| 42 1/2 [1079.5] | 32 1/4 [819.2]    |
|                 | 34 13/16 [884.2]  |
|                 | 37 3/8 [949.3]    |
|                 | 39 15/16 [1014.4] |
| 55 [1397.0]     | 45 1/16 [1144.6]  |
|                 | 47 5/8 [1209.7]   |
|                 | 50 3/16 [1274.8]  |
|                 | 52 3/4 [1339.9]   |
| 65 [1651.0]     | 57 7/8 [1470.0]   |
|                 | 60 7/16 [1535.1]  |
|                 | 63 [1600.2]       |
| 75 [1905.0]     | 68 1/8 [1730.4]   |
|                 | 70 11/16 [1795.5] |
|                 | 73 1/4 [1860.6]   |
| 79 1/2 [2019.3] |                   |
| 81 1/2 [2070.1] |                   |
| 83 1/2 [2120.9] |                   |
|                 | 85 [2159.0]       |