

Concealed Geared Hinges


46 fasteners / 47 bearings

SL14 120" HD

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

NOTE: For 90-degree openings, please specify at time of order for no upcharge. There will be an upcharge for 90-degree ATW cover plates when ordered separately and clear or bronze must be specified.

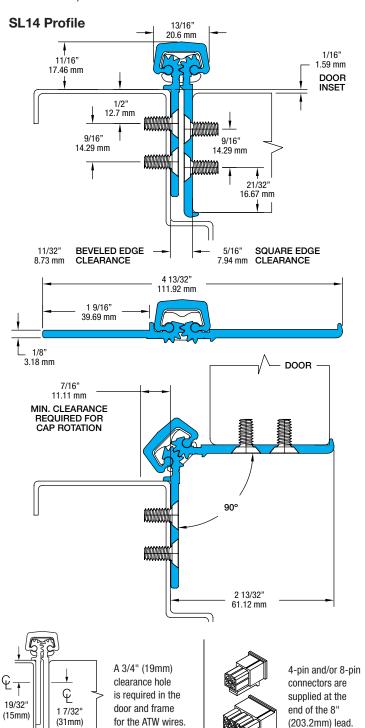

ATW LOCATIONS **HOLES** - 10.1 0 - 1 1/2 [38.1] 3 1/2 [88.9] 5 1/2 [139.7] 7 15/32 [189.7] 10 [254.0] 12 19/32 [319.9] 15 5/32 [385.0] 17 23/32 [450.1] 20 [508.0] 22 27/32 [580.2] 25 13/32 [645.3] 27 31/32 [710.4] 30 [762.0] 33 3/32 [840.6] 35 21/32 [905.7] 38 7/32 [970.8] 40 [1016.0] 43 11/32 [1100.9] 45 29/32 [1166.0] 48 15/32 [1231.1] 50 [1270.0] 53 19/32 [1361.3] 56 5/32 [1426.4] 60 [1524.0] 63 27/32 [1621.6] 66 13/32 [1686.7] 70 [1778.0] 74 3/32 [1882.0] 76 21/32 [1947.1] 80 [2032.0] 81 25/32 [2077.2] 84 11/32 [2142.3] 86 29/32 [2207.4] 90 [2286.0] 92 1/32 [2337.6] 94 19/32 [2402.7] 97 5/32 [2467.8] 100 [2540.0] 102 9/32 [2597.9] 104 27/32 [2663.0] 107 13/32 [2728.1] 110 [2794.0] 112 17/32 [2858.3] 114 1/2 [2908.3] 116 1/2 [2959.1] 118 1/2 [3009.9] ⁻ 120 [3048.0]