

Concealed Geared Hinges


38 fasteners / 16 bearings

SL18 85" SD

All dimensions are measured in inches and [millimeters] from the top of the door to the centerline of the holes and ATW panels.

Choose location for ATW prep. ATW4 = 1 location; ATW8 = 1 location; and ATW12 = 1 location.

NOTE: For 90-degree openings, please specify at time of order for no upcharge. There will be an upcharge for 90-degree ATW cover plates when ordered separately and clear or bronze must be specified.

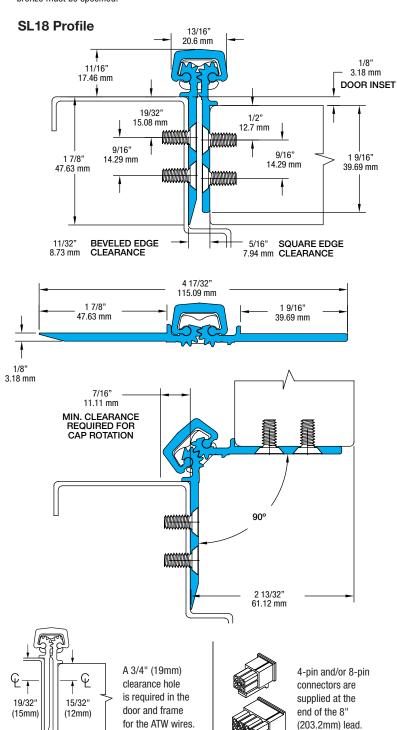

HOLES ATW LOCATIONS [0.]01 1/2 [38.1] -3 1/2 [88.9] 5 1/2 [139.7] 7 29/32 [200.8] 10 [254.0] -13 1/32 [331.0] 15 19/32 [396.1] 18 5/32 [461.2] 20 [508.0] 23 9/32 [591.3] 25 27/32 [656.4] 28 13/32 [721.5] 30 [762.0] -33 17/32 [851.7] 36 3/32 [916.8] 38 21/32 [981.9] 42 1/2 [1079.5] 46 11/32 [1177.1] 48 29/32 [1242.2] 51 15/32 [1307.3] 55 [1397.0] -56 19/32 [1437.5] 59 5/32 [1502.6] 61 23/32 [1567.7] 65 [1651.0] 66 27/32 [1697.8] 69 13/32 [1762.9] 71 31/32 [1828.0] 75 [1905.0] -77 3/32 [1958.2] 79 1/2 [2019.3] -81 1/2 [2070.1] -83 1/2 [2120.9] ⁻85 [2159.0]