


HIGH PERFORMANCE CONTINUOUS HINGES MADE IN THE U.S.A.

- Aluminum Geared
- Stainless Steel Pin & Barrel

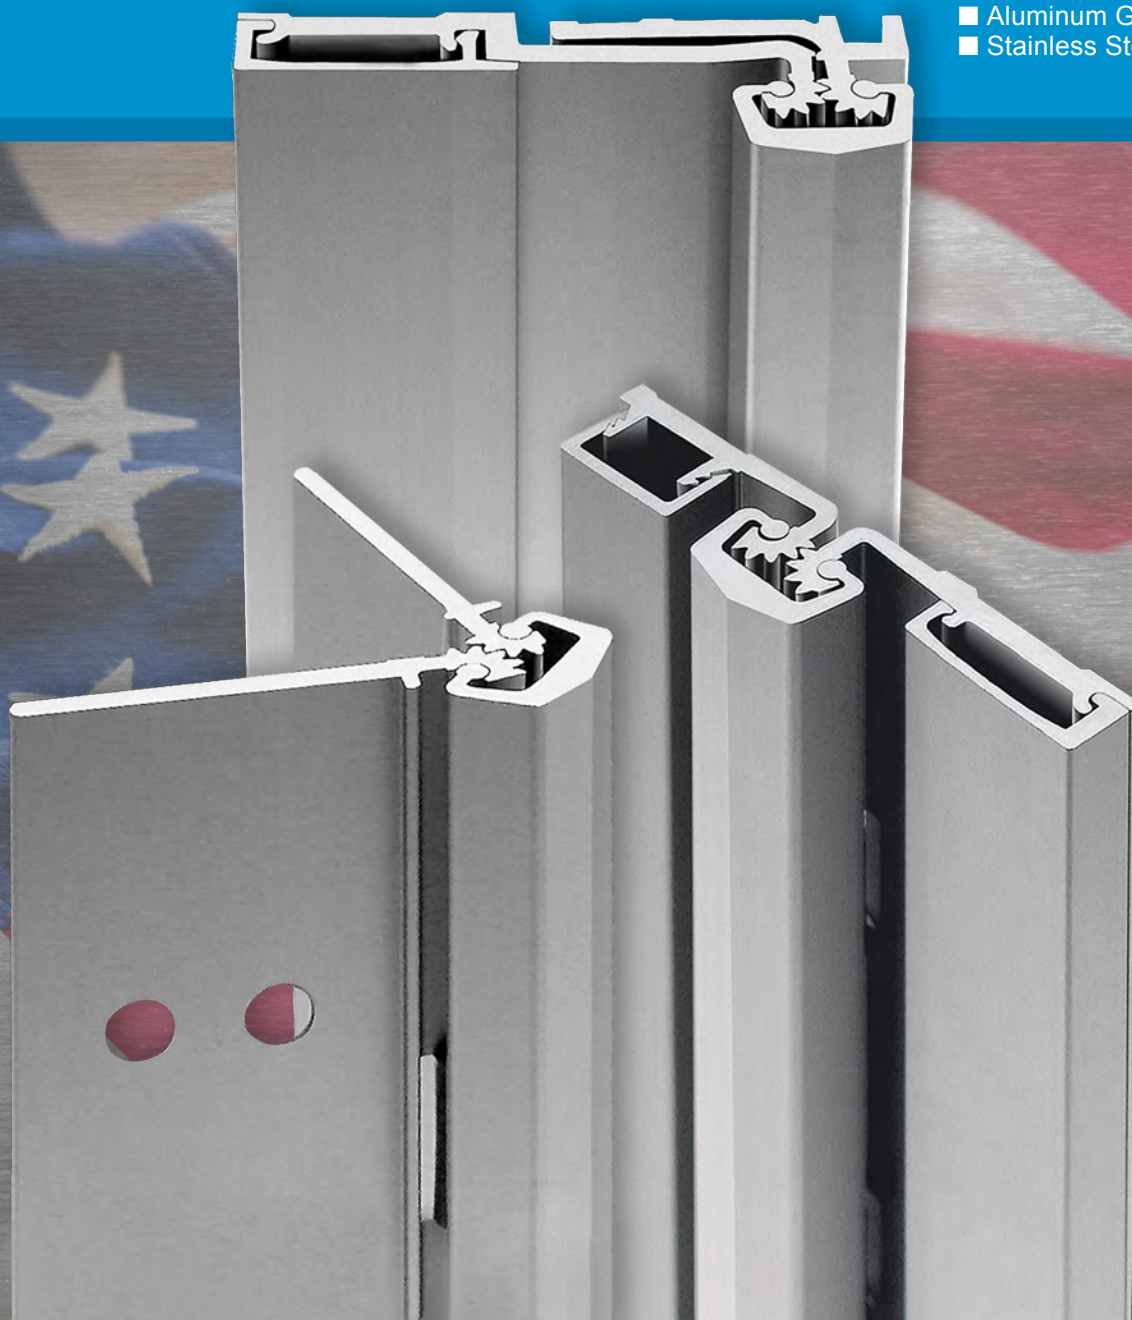

## Pricing Guide

EFFECTIVE APRIL 7, 2025

*Replaces February 2, 2024 pricing guide. List prices subject to change without notice.*



Select-Hinges.com  
800-423-1174



## STANDARD ORDERS

- **Shipping** 48 hours or less for standard products on orders received before 3:00 p.m. Orders received after 3:00 p.m. may be processed the next business day. Large quantities and custom processing may require additional time.
- **Drop Shipments** There will be a charge of \$17.50 net for drop shipments.
- **Terms** Net 30 days.
- **Freight** Net amounts of \$1,800 or more: Prepaid and allowed, routing of our choice. (48 contiguous states and Canada only.) Net amounts less than \$1,800: Freight costs are prepaid and added. (48 contiguous states and Canada only.)
- **Special Shipments** Oversized shipments (greater than 95" long) will ship via FedEx 3-Day or truck only. Additional fees may apply to orders shipped outside the 48 contiguous states, special packaging and advance notification requests. Please consult with SELECT.

## GEARED HINGES IN STOCK

- **Lengths** 83" / 85" / 95" / 120". SELECT hinges are normally 1" shorter than actual opening height. Custom lengths can be ordered (see page 5).
- **Standard Colors** Anodized after machining. Custom colors can be ordered (see page 5).  
**CL**=Clear **BR**=Dark Bronze **BK**=Black (stocked in many hinge models)
- **Load/Frequency Rating** For 1-3/4" doors except where noted; 48" max. door width. Frequency of use and door weight determine the hinge duty needed. SELECT Geared Continuous Hinge model numbers indicate appropriate hinge duty.
- **Heavy Duty [HD300]** Up to 300 lb. for high-frequency doors.
- **Heavy Duty [HD600]** Up to 600 lb. for high-frequency doors.
- **Heavy Duty [LL]** Up to 1,000 lb. for low- to medium-frequency doors, including most lead-lined doors.
- **Door Insets** Choose the SELECT hinge model to match your door inset. Door insets are indicated next to applicable hinge models listed on pages 7-11.

## Geared Hinge Fasteners\*

**\*No discounts apply to net add items.**  
*Hinges prepared with custom processing are non-returnable.*

### STANDARD FASTENERS

All SELECT hinges are shipped with Self-Drilling, Thread-Forming, Stainless Steel Screws (SDTF) unless otherwise requested.

**NOTE:** We do not recommend the use of self-drilling, thread-forming screws in grouted frames.

- **SDTF** 12-24 × 3/4", Self-Drilling, Thread-Forming, 410 SS Screws, Phillips Undercut Flathead

### OPTIONAL FASTENERS

The optional fasteners listed below may be requested at no upcharge, and must be specified on the original purchase order:

- **TF** 12-24 × 1/2", Thread-Forming, 410 SS Screws, Phillips Undercut Flathead (pilot hole required)
- **WD** 12-14 × 1-1/2", 410 SS Wood Screws
- **WD/SDTF** 12-14 × 1-1/2", 410 SS Wood Screws and 12-24 × 3/4", Self-Drilling, Thread-Forming, 410 SS Screws
- **WD/TF** 12-14 × 1-1/2", 410 SS Wood Screws and 12-24 × 1/2", Thread-Forming, 410 SS Screws

### TORX® SECURITY FASTENERS

Optional Torx® security fasteners are available at extra cost.

- **For Metal Doors** ..... \$0.63 net add per screw  
Tamper-resistant 12-24 × 1/2" thread-forming or 12-24 × 3/4" self-drilling, thread-forming 6-lobe T-25 with pin. Clear or Dark Bronze.
- **For Wood Doors** ..... \$0.68 net add per screw  
Tamper-resistant 12-14 × 1-1/2" 6-lobe T-25 with pin. Clear or Dark Bronze.
- **Shoulder Screws** ..... \$2.62 net add per screw  
Tamper-resistant 1/4-20 6-lobe T-25 with pin. Clear or Dark Bronze.
- **Special Bit for Torx® Screws** ..... \$1.29 net add

### RIVNUT® FASTENERS

Optional Rivnut® fasteners are available at extra cost.

- **Rivnuts & Long Fasteners** ..... \$2.30 net add per pair  
Pair: 12-24 × 1" hinge screw with Rivnut. Clear or Dark Bronze.
- **Rivnut Installation Tool** ..... \$195 net add per tool

## Fire-Rated Hinges

**No discounts apply to net add items.**  
*Hinges prepared with custom processing are non-returnable.*

All SELECT hinges have been UL® tested and listed to 90-minute Fire Rating Standards without fire pins or studs—at no extra cost (except SL71, SL77 and Toilet Partition hinges).

### PATENTED DESIGN OPTION

Only SELECT's patented process allows A-Label Fire Listing for up to 3 hours without fire pins or studs. SELECT hinges have been tested by Underwriters Laboratories, Inc. to meet the Positive and Negative pressure requirements of UL10B, UL10C and UBC 7.2 (1997).

THE FOLLOWING HINGES ARE LISTED BY UNDERWRITERS LABORATORIES, INC. TO U.S. AND CANADIAN SAFETY STANDARDS: DOOR HINGES SELECT PRODUCTS LIMITED, KALAMAZOO, MI 49009, R16019 ALUMINUM CONTINUOUS HINGES:

**Models SL11, SL12, SL14, SL18, SL21, SL24, SL26, SL27, SL31, SL38, SL40, SL41, SL44, SL48, SL52, SL53, SL54, SL57 and SL84** for use on swinging single or pairs of fire doors, including double egress, up to 3 hours (not available on SL38) for hollow metal or steel covered composite and 1-1/2 hours for wood composite and wood core type fire doors with a maximum size of 4 ft. wide and 10 ft. high, installed in masonry or drywall.

- **UL Labeled 3-HR. Fire Rating [FR3].** ..... \$18 net add per hinge

**NOTE:** Not available on SL38.



**SELECT HINGE**  
DOOR HINGE  
F 1550 f  
1-1/2 & 3 Hr

# Electrical Modifications

No discounts apply to net add items.  
Hinges prepared with custom processing are non-returnable.

## No discounts apply to net add items.

Specify prep locations from top of hinge. See SELECT catalog for specific prep locations. Hinges prepared with electrical modifications are non-returnable.

Lead times may vary depending on the number of hinges ordered.  
Changes/cancellations on custom-modified hinge orders are subject to charges for work already performed and materials utilized.

### ■ Electric Power Transfer Prep [EPT Prep]

Hinges can be prepared for a variety of power transfer units. Specify VD-EPT for Von Duprin EPT2, EPT10 or PNT1. All others, refer to SELECT catalog or website EPT order form. Available on models SL11, SL12, SL14, SL18, SL24, SL26, SL27, SL31, SL44, SL48, SL52, SL53, SL54, SL77 and SL84. Handing required except for VD-EPT on SL11 and SL27 hinges.

**EPT prep** ..... \$41 net add per prep

### ■ Electric Power Transfer Prep [EPT Prep] on SL40 & SL41

If an EPT prep is required on models SL40 (wide throw) or SL41 (swing clear), please consult the factory for engineering approval and upcharge.

### ■ Exposed Electric Monitor Switch [EMS]

One EMS switch needed per monitoring hinge. 120V AC @ 250MA 30W maximum. Available on models SL11, SL12, SL14, SL18, SL24, SL26, SL27, SL31, SL38, SL40, SL41, SL44, SL48 and SL84. Handing required.

**EMS** ..... \$46 net add per EMS

### ■ Concealed Through-Wire [CTW]

Continuous electric conductors fit in bearing slots. See SELECT catalog or website for templates. Per conductor: 12V-24V AC/DC @ 3-6 amps. Ultra flexible 22 gauge wire with 8" leads per leaf. All CTW options available on heavy duty (HD600 and LL) models SL11, SL12, SL14, SL18, SL24, SL26, SL27, SL31, SL44, SL48 and SL84, and heavy duty (HD600) model SL57. Heavy duty (HD300) models SL11, SL14, SL18, SL24 and SL57 available with 4- or 5-wire CTW only.

**CTW-4 (4-wire)** ..... \$108 net add per CTW-4

**CTW-5 (5-wire)** ..... \$113 net add per CTW-5

**CTW-8 (8-wire)** ..... \$126 net add per CTW-8

**CTW-10 (10-wire)** ..... \$137 net add per CTW-10

**CTW-12 (12-wire)** ..... \$156 net add per CTW-12

**Extra-long leads (optional, 48" max.)** . . . \$28 net add per ft.





### ■ Concealed Adjustable Magnetic Monitor Switch [CMG Prep]

22 gauge wire, 14" leads, 28 volts DC. Available on models SL11, SL12, SL14, SL18, SL24, SL26, SL27, SL31, SL40, SL41, SL44, SL48 and SL84. Handing required.

**CMG Prep** ..... \$100 net add per CMG

## HANDING IDENTIFICATION

Stand in doorway with door open and back toward hinge.



# Electrical Access Panel Preps

No discounts apply to net add items.  
Hinges prepared with custom processing are non-returnable.

### ■ Electrical Access Panels [RP Prep] or [AP Prep]


RP or AP Prep available on models SL11, SL12, SL14, SL18, SL24, SL26, SL27, SL31, SL38, SL44, SL48 and SL84.

RP Prep ONLY also available on model SL57. Engineering approval is required and handing is required. Electrical Access Panels are recommended for EMS, CTW and CMG Preps.

The Accessible Panel (AP) opens to allow electrical diagnostics, while the Removable Panel (RP) can be removed to service electrical wiring without removing door.

**AP Prep** ..... \$93 net add per prep


**RP Prep** ..... \$93 net add per prep



SHOWN:

AP Prep (\$93.00)  
+ CTW-4 (\$108.00)

\$201.00 net



SHOWN:

RP Prep (\$93.00)  
+ CTW-4 (\$108.00)

\$201.00 net

NOTE: Electrical modification not included and must be ordered separately.



# Accessible Through-Wire Preps

No discounts apply to net add items.  
Hinges prepared with custom processing are non-returnable.

## No discounts apply to net add items.

Specify prep locations from top of hinge. See SELECT catalog for specific prep locations. Hinges prepared with electrical modifications are non-returnable.

Lead times may vary depending on the number of hinges ordered.  
Changes/cancellations on custom-modified hinge orders are subject to charges for work already performed and materials utilized.

### Accessible Through-Wire Prep [ATW]

Recessed continuous electric conductors with removable/accessible panel. No cuts in hinge leaves or cap for optimum hinge performance and appearance. See SELECT catalog or website for templates. Per conductor: 12V-24V AC/DC @ 3-6 amps. Ultra flexible 22 gauge wire with 8" leads. Molex® connectors included per leaf. Available on models SL11, SL12, SL14, SL18, SL24, SL26, SL27, SL31, SL44, SL48 and SL84. Hanging required, except for SL11 and SL27. Hinges with ATW prep can be ordered with a painted finish on the gear cap only.

ATW-4 (4-wire) . . . . . \$176 net add per ATW-4  
ATW-8 (8-wire) . . . . . \$188 net add per ATW-8  
ATW-12 (12-wire) . . . . . \$204 net add per ATW-12

NOTE: For 90-degree openings, please specify at time of order for no upcharge. 90-degree ATW cover plates are \$19 net when ordered separately and clear, bronze or black must be specified.

### Accessible Through-Wire Removable Panel Prep [ATWRP]

Retrofit option available to electrify an existing concealed hinge or to fix a failed electronic entryway. Specify hinge model for which the panel is needed, and Clear [CL], Dark Bronze [BR] or Black [BK] finish. ATWRP modification has no warranty.

ATW4RP (4-wire) . . . . . \$176 net add per ATW4RP  
ATW8RP (8-wire) . . . . . \$188 net add per ATW8RP  
ATW12RP (12-wire) . . . . . \$204 net add per ATW12RP

NOTE: ATWRP prep is not covered under the SELECT warranty.

### 12-Wire Lead Adaptors with Molex® Connectors

ATW Adaptors with 12-wire Molex® connectors are available in 4 lengths from 8" to 120".


ATWADPT8 (8") . . . . . \$15 net per frame and/or door  
ATWADPT24 (24") . . . . . \$19 net per frame and/or door  
ATWADPT48 (48") . . . . . \$22 net per frame and/or door  
ATWADPT120 (120") . . . . . \$35 net per frame and/or door

# Hospital Tips

No discounts apply to net add items.  
Hinges prepared with custom processing are non-returnable.



Black polymer TIPIT® LB

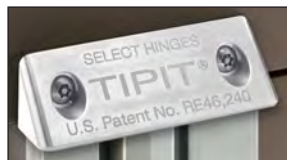

Metal TIPIT® LM



Gray polymer TIPIT® CG



Metal TIPIT® CM



HT Prep with end cap

### Ligature-resistant TIPIT® for Full Surface, Half Surface, Half Mortise, Swing Clear and Concealed Safety Hinges

**Metal [TIPIT LM]** . . . . . \$71 net add per TIPIT  
**Polymer [TIPIT L]** . . . . . \$45 net add per TIPIT  
Patented design. For SL21 and SL57 full surface hinges, SL52 half mortise hinges, SL53, SL54 and SL77 half surface hinges, SL41 swing clear hinges and SL71 concealed safety hinges. Mounts on surface of frame, above the hinge. Retrofit applications: Works with most brands of full surface, half surface and swing clear-type continuous geared hinges. Includes large TIPIT® and four (4) #10 Torx® security screws. Polymer TIPIT L available in: **B** = Black **G** = Gray.

### Hinge Preparation for TIPIT® L

**[TIPIT PREP]** . . . . . \$12 net add per hinge  
For SL21 and SL57 full surface hinges, and SL53, SL54 and SL77 half surface hinges. Factory preparation of door leaf covers, for field installation of TIPIT®. Specify [TIPIT PREP] on your hinge order. Patented.

NOTE: Order TIPIT® L separately from TIPIT PREP.

NOTE: TIPIT PREP not necessary for SL41 swing clear hinges, SL52 half mortise hinges or SL71 concealed safety hinges.

### Ligature-resistant TIPIT® for Concealed Hinges

(excluding Concealed Safety Hinges)

**Metal [TIPIT CM]** . . . . . \$32 net add per TIPIT  
**Polymer [TIPIT C]** . . . . . \$20 net add per TIPIT  
Patented design. For new or retrofit applications of most concealed hinges. Mounts on surface of frame, above new or existing continuous hinge. Works with most brands of concealed continuous geared hinges. Includes small TIPIT® and one (1) #10 Torx® security screw. Polymer TIPIT C available in: **B** = Black **G** = Gray.

### Hospital Tip Preparation [HT Prep] . . . \$34 net add per hinge

Angle-cut hinge prep for new concealed hinges up to 95". Available on the following model hinges: SL11, SL12, SL14, SL18, SL24, SL26, SL27, SL31, SL38, SL44, SL48 and SL84 concealed hinges only. Hanging required, except SL11, SL27 and SL38.

Polymer end cap in: **B** = Black **G** = Gray

NOTE: Not available on hinges longer than 95".

NOTE: Not available on SL71 concealed safety hinges, SL21 and SL57 full surface hinges, SL52 half mortise hinges, SL53, SL54 and SL77 half surface hinges, SL40 wide throw hinges, SL41 swing clear hinges or SL60/62 toilet partition hinges.

NOTE: Not available with the Security Option.

Metal TIPIT® and SELECT hinge combinations meet patient safety standards. See it in the FGI Behavioral Health Design Guide, [www.omh.ny.gov/omhweb/patient\\_safety\\_standards/guide.pdf](http://www.omh.ny.gov/omhweb/patient_safety_standards/guide.pdf), or reach out to SELECT Hinges for expert guidance.

## CUSTOM PROCESSING

- **Express Shipments** . . . . . \$10 net add per hinge  
Order by noon (EST). Most hinges shipped out the same day.
- **Special Packaging** . . . . . \$10 net add per package  
Specially reinforced packaging to prevent in-transit damage, including single-hinge shipments.
- **Master Marking** . . . . . No charge
- **Individual Hinge Marking** . . . . . \$1 net add per hinge
- **Extra-Long Hinges [LH Prep]** . . . . . \$49 net add per splice  
168" maximum length. Leaves are spliced together, with a staggered joint and continuous gear cap. Pricing based upon number of hinges used plus splicing charge per hinge. Handling required except for SL11, SL21, SL27, SL40 and SL57. Not available on SL31, SL38, SL44, SL48 or SL60/62.
- **Custom-Cut Hinges**  
Cutting more than 5" off standard length (excluding SL60/62). For SL60/62, contact SELECT for a quote. Handling required, except on SL11, SL27, SL38, SL40 and SL60/62.  
**Full Surface, Half Surface & Half Mortise hinges [FH Prep]** . . . . . \$10 net add per hinge  
**Others [MACH Prep]** . . . . . \$5 net add per hinge
- **Fire Label Cutout [CUTOUT19]** . . . . . \$39 net add per cutout  
Hinges can be prepared with a cutout to expose fire labels on doors and/or frames. Refer to SELECT catalog or website Fire Label Cutout order form. Available on models SL11, SL12, SL14, SL18, SL24, SL26, SL27, SL31, SL40, SL41, SL44, SL48, SL52, SL53, SL54 and SL84. Engineering approval is required.
- **Cutting Hinges in the Field**  
See SELECT Installation Instructions and Warranty for specific information regarding field alterations.
- **Dutch Door Hinges [DD Prep]** . . . . . \$44 net add per hinge  
Frame leaf is furnished as a continuous length. Door leaf is cut to fit the specified Dutch Door height. Required: Handling and measurements for net hinge length, top door leaf length, bottom door leaf length and clearance (3/16" min.) between top and bottom leaves. Refer to SELECT website for Dutch Door order form. Not available on SL60/62.
- **Header Gap Prep [HDRGAP Prep]** . . . . . \$11 net add per hinge  
No more shimming! Door leaf trimmed 1/8" at the top and bottom to incorporate clearance required for installation. Handling required; available on all models.

## LEAF COVERS

- **Door Leaf Replacement Cover** . . . . . \$24 net add per cover  
For SL21, SL53, SL54, SL57 and SL77. Clear, Dark Bronze or Black anodized aluminum.
- **Frame Leaf Replacement Cover** . . . . . \$24 net add per cover  
For SL52, SL57 and Latch Guard. Clear, Dark Bronze or Black anodized aluminum.
- **Lead Lined Door Leaf Cover** . . . . . \$50 net add per cover  
For SL21, SL53, SL54, SL57 and SL77. Clear, Dark Bronze or Black anodized aluminum.
- **Lead Lined Frame Leaf Cover** . . . . . \$50 net add per cover  
For SL52 and SL57. Clear, Dark Bronze or Black anodized aluminum.

## SECURITY PREPS

- **Security Option [SO Prep]** . . . . . \$22 net add per hinge  
Non-removable bearing added at top of hinge to prevent material from falling into the opening between cap and gears. Hinge must be installed with security bearing at top of door. Handling required, except for SL11, SL27, SL38 and SL40. Not available on hinges longer than 95". Not available with Hospital Tip.
- **Tamper-Resistant Hinge [SO Prep B]** . . . \$37 net add per hinge  
Entire hinge prepared with set screws installed in every other bearing and tightened against inside of gear cap for additional security against tampering.

## NEW! SELF-CENTERING HINGE BIT

- **CB172S Self-centering Hinge Bit** . . . . . \$26 net add per bit  
Easy to use, self-centering hinge bit to accurately drill pilot holes for self-tapping, thread-forming screws. 1/4" hex power bit shank, 11/64" HSS twist drill bit, 3/8" diameter nose bushing.
- **CB172SBIT Replacement Drill Bit for CB172S** . . . . . \$8 net add per bit  
11/64" HSS twist drill bit.

## NEW! MASONRY BIT

- **HB156M Masonry Bit** . . . . . \$5 net add per bit  
5/32" diameter x 6" long carbide-tipped masonry bit with upgraded hex shank design for drilling into slush-filled frames.

## THROUGH-BOLT DRILL BIT

- **HB375 Drill Bit** . . . . . \$20 net add per bit  
.375" hole diameter, specially designed for SELECT hinges. Eliminates need for center punch.

## NEW! FILLER PLATES

- **Butt Hinge Cutout Filler Plate** . . . . . \$2 net add per cover  
Cover cutouts left by previous butt hinges. Perfect for storefronts and hollow metal doors. Minimum order quantity: 12 of one color.  
**FILLERPLATEG** = Gray  
**FILLERPLATEB** = Black

## SHIM STOCK

Reduce clearance between the door and frame with Concealed hinges, or provide additional door inset from the frame with Full Surface and Half Surface hinges.

- **Aluminum Shim Stock [SH8X1295]** . . . . . \$20.50 net add each  
Clear anodized, 1/8" x 1-1/2", 95" long, no holes.
- **UHMW Plastic Shim Stock**  
Self-adhesive translucent material. Cannot be used on fire doors. Available in 100-foot rolls.  
**SHRL32X112** 1/32" x 1-1/2" x 100' . . . . . \$129 net  
**SHRL32X12** 1/32" x 1/2" x 100' . . . . . \$71 net  
**SHRL62X112** 1/16" x 1-1/2" x 100' . . . . . \$182 net  
**SHRL62X12** 1/16" x 1/2" x 100' . . . . . \$100 net
- **NEW! Fire Door Steel Shim Stock**  
Low carbon steel, 95" long, no holes.  
**FDSS6X112** 1/16" x 1-1/2" x 95" . . . . . \$26 net  
**FDSS8X112** 1/8" x 1-1/2" x 95" . . . . . \$41 net

# Additional Optional Preps & Accessories

## HOLE COVERS

- **Pivot Hinge Hole Cover** . . . . . \$2.70 net add per cover  
Cover holes left by previous door prep. Minimum order quantity:  
25 of one color.
- PIVCOVERG = Gray
- PIVCOVERB = Dark Bronze

## CUSTOM COLORS

- **Bone White Gear Cap** . . . . . \$29 net add per hinge  
Color: Bone White only; 2 coats Kynar 500; 70% resin  
Valspar: 391X035 PPG: UC43350  
In-Stock: Lengths 95" and under.

- **Custom Anodized Colors** . . . . . Contact SELECT for quote  
SELECT hinges are available in a wide variety of custom  
anodized colors, including:

**MG** = Matte Gold    **CH** = Champagne

Orders require a set-up charge. Lead time of up to 6-8 weeks  
may be needed.

- **Custom Kynar® Paint Color** . . . . . Contact SELECT for quote  
Gear caps or entire hinges on all models of SELECT hinges  
can be custom painted. Custom paint orders are individually  
quoted and require color approvals. Lead time of up to 4-6  
weeks may be needed. Hinges with ATW prep can be ordered  
with a painted finish on the gear cap *only*.

# Don't Compromise on Security

Stop break-ins before they start with  
SELECT's NEW pre-drilled continuous Latch Guard.




## NEW! SECURITY LATCH GUARD


The ultimate defense for doors in high-risk,  
low-visibility areas. Perfect for back doors,  
strip malls and cannabis dispensaries.

- Pre-drilled holes and included  
fasteners save valuable time
- Fasteners concealed on  
jamb side for added security
- Robust appearance scares  
off break-in attempts
- Full-length protection deters air wedges,  
pry bars, Sawzalls and loiding
- Blends seamlessly with a SELECT  
continuous geared hinge
- Outswing, Inswing and  
Extra-wide Outswing available
- 83" and 95" lengths
- Clear, Dark Bronze and Black  
anodized aluminum


### Outswing



### Outswing Wide



### Inswing



Model	83"	95"
LGO83 CL	255	-
LGO95 CL	-	285
LGO83 BR	266	-
LGO95 BR	-	296
LGO83 BK	266	-
LGO95 BK	-	296

Model	83"	95"
LGOW83 CL	270	-
LGOW95 CL*	-	300
LGOW83 BR	281	-
LGOW83 BK	281	-

\*LGOW 95" may experience longer lead times


Model	83"	95"
LGI83 CL	255	-
LGI95 CL	-	285
LGI83 BR	266	-
LGI95 BR	-	296
LGI83 BK	266	-
LGI95 BK	-	296

## CONCEALED

CONCEALED EDGE MOUNT architectural grade aluminum hinges. No mortise required. For new construction or renovation/retrofit.

### SL11


- Concealed hinge
- Flush mounted
- For 1-3/4" doors
- Grade 1



Model #	79"	83" / 85"	95"	120"
SL11 CL HD300	-	167	204	-
SL11 CL HD600	193	193	246	383
SL11 CL LL	-	226	331	457
SL11 BR HD300	-	203	265	-
SL11 BR HD600	-	249	312	501
SL11 BR LL	-	312	384	576
SL11 BK HD300	-	212	278	-
SL11 BK HD600	-	261	328	526
SL11 BK LL	-	328	403	605

### SL12


- Concealed hinge
- Beveled frame leaf
- Compatible with EFCO doors
- Staggered hole pattern
- 3/32" door inset
- For 1-3/4" doors
- Grade 1



Model #	83"	95"	120"
SL12 CL HD600	202	246	378
SL12 BR HD600	246	305	468

### SL14


- Concealed hinge
- Narrow frame leaf
- Door edge protector
- 1/16" door inset
- For 1-3/4" doors
- Grade 1



Model #	83"	85"	95"	120"
SL14 CL HD300	169	169	205	-
SL14 CL HD600	210	210	256	383
SL14 BR HD300	203	203	256	-
SL14 BR HD600	257	257	326	502
SL14 BK HD300	212	-	270	-
SL14 BK HD600	271	-	341	527

### SL18


- Concealed hinge
- Beveled frame leaf
- 1/8" door inset
- For 1-3/4" doors
- Grade 1



Model #	83"	85"	95"	120"
SL18 CL HD300	169	169	206	-
SL18 CL HD600	211	211	256	384
SL18 CL LL	285	285	328	457
SL18 BR HD300	202	202	256	-
SL18 BR HD600	257	257	323	488
SL18 BR LL	329	329	396	561
SL18 BK HD600	271	-	340	513

### SL24

- Concealed hinge
- Door edge protector
- Frame leaf covers butt hinge preps
- 1/16" door inset
- For 1-3/4" doors
- Grade 1



Model #	79"	83"	85"	95"	120"
SL24 CL HD300	-	169	169	206	-
SL24 CL HD600	201	201	201	256	384
SL24 CL LL	-	227	227	328	457
SL24 BR HD300	-	202	202	256	-
SL24 BR HD600	-	251	251	316	488
SL24 BR LL	-	322	322	387	561
SL24 BK HD600	-	263	-	332	513

NOTE: Custom lengths are available and require handing, except SL11, SL27, SL38, SL40 and SL60/62.

Send quote requests and purchase orders to [customerservice@select-hinges.com](mailto:customerservice@select-hinges.com)




## CONCEALED

CONCEALED EDGE MOUNT architectural grade aluminum hinges. No mortise required. For new construction or renovation/retrofit.

### SL26


- Concealed hinge
- For 2" to 2-1/4" doors
- Staggered hole pattern
- For doors up to 1,000 lb.
- Narrow frame leaf
- 3/32" door inset
- Grade 1



Model #	83" / 85"	95"	120"
SL26 CL LL	224	274	427
SL26 BR LL	277	349	552

### SL27

- Concealed hinge
- For 2" to 2-1/4" doors
- Frame leaf covers butt hinge preps
- Staggered hole pattern
- For doors up to 1,000 lb.
- Flush mounted
- Grade 1



Model #	83"	85"	95"	120"
SL27 CL LL	224	224	274	427
SL27 BR LL	277	277	349	552
SL27 BK LL	291	-	366	580

### SL31

- Concealed hinge
- Short frame leaf allows for removable stop applications
- For 1-3/4" doors
- Flush mounted
- Grade 1



Model #	83"	95"	120"
SL31 CL HD600	192	233	383
SL31 BR HD600	236	305	-
SL31 BK HD600	248	320	499

### SL38


- Concealed hinge
- For 1" to 1-3/8" doors
- Flush mounted



Model #	83"	95"
SL38 CL HD300	143	204
SL38 BR HD300	179	221

### SL44


- Concealed hinge
- Short frame leaf allows for removable stop applications
- Door edge protector
- 1/16" door inset
- For 1-3/4" doors
- Grade 1



Model #	83"	95"
SL44 CL HD600	192	233
SL44 BR HD600	235	298

### SL48

- Concealed hinge
- Short frame leaf allows for removable stop applications
- 1/8" door inset
- For 1-3/4" doors
- Grade 1



Model #	83"	95"
SL48 CL HD600	192	233
SL48 BR HD600	235	298

NOTE: Custom lengths are available and require handling, except SL11, SL27, SL38, SL40 and SL60/62.

Send quote requests and purchase orders to [customerservice@select-hinges.com](mailto:customerservice@select-hinges.com)



## CONCEALED

CONCEALED EDGE MOUNT architectural grade aluminum hinges. No mortise required. For new construction or renovation/retrofit.

### SL71


- Concealed safety hinge (when used without frame stop)
- Provides clearance sufficient to avoid the pinching of fingers
- Flush mounted
- For 1-3/4" doors
- Grade 1



Model #	83"	95"
SL71 CL HD600	332	439
SL71 BR HD600	433	554

### SL84

- Concealed hinge
- Beveled frame leaf
- Door edge protector
- 1/16" door inset
- For 1-3/4" doors
- Grade 1



Model #	83" / 85"	95"	120"
SL84 CL HD600	212	264	391
SL84 CL LL	286	336	462
SL84 BR HD600	260	331	492
SL84 BR LL	333	402	564

## WIDE THROW

Concealed hinge with WIDE THROW for clearance of brick moldings or special door/frame designs.

### SL40

- Wide throw hinge
- Clearance of brick moldings or special door/frame designs
- Frame leaf covers butt hinge preps
- Flush mounted
- For 1-3/4" doors
- Grade 1




Model #	83"	95"
SL40 CL HD600	470	596
SL40 BR HD600	541	740

## SWING CLEAR

Concealed hinge with SWING-CLEAR ACTION. Ideal for hospital applications.

### SL41

- Swing-clear action
- Door edge protector
- Requires 2-1/4" frame face for full rotation clearance
- 1/16" door inset
- For 1-3/4" doors
- Grade 1

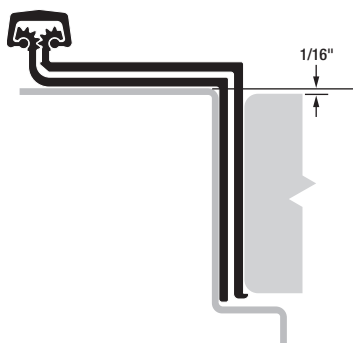

Model #	83" / 85"	95"	120"
SL41 CL HD600	346	447	700
SL41 CL LL	419	520	773
SL41 BR HD600	452	571	931
SL41 BR LL	523	643	1,003

NOTE: Custom lengths are available and require handing, except SL11, SL27, SL38, SL40 and SL60/62.


Send quote requests and purchase orders to [customerservice@select-hinges.com](mailto:customerservice@select-hinges.com)

## HALF SURFACE

The perfect solution for renovation/retrofit or new construction. MOUNTS ON DOOR FACE AND FRAME RABBET.

### SL53


- Half surface hinge
- Narrow frame leaf
- Tamper-resistant, removable door leaf cover
- 3/32" door inset
- For 2" to 2-1/4" doors, request long barrel nuts
- Grade 1



Model #	83"	85"	95"	120"
SL53 CL HD600	282	282	342	563
SL53 BR HD600	362	362	437	763
SL53 BK HD600	379	-	459	801

### SL54


- Half surface hinge
- Frame leaf covers butt hinge preps
- Tamper-resistant, removable door leaf cover
- 3/32" door inset
- For 2" to 2-1/4" doors, request long barrel nuts
- Grade 1




Model #	83"	85"	95"	120"
SL54 CL HD600	282	282	342	563
SL54 BR HD600	362	362	437	763
SL54 BK HD600	379	-	459	801

### SL77

- Safety hinge (when used without frame stop)
- Provides clearance sufficient to avoid pinching fingers
- Can be used for center-hung applications (without safety feature)
- Tamper-resistant, removable door leaf cover
- 3/32" door inset when used as a safety hinge
- For 2" to 2-1/4" doors, request long barrel nuts
- Grade 1



SAFETY HINGE APPLICATION

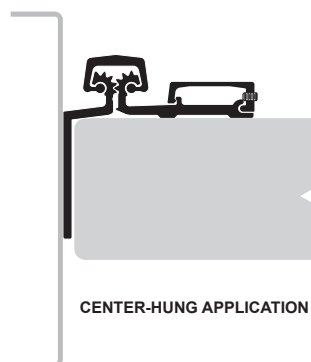

CENTER-HUNG APPLICATION

Model #	83"	95"
SL77 CL HD600	316	384
SL77 BR HD600	396	484

NOTE: Custom lengths are available and require handing, except SL11, SL27, SL38, SL40 and SL60/62.


Send quote requests and purchase orders to [customerservice@select-hinges.com](mailto:customerservice@select-hinges.com)

## HALF MORTISE

The perfect solution for renovation/retrofit or new construction. MOUNTS ON FRAME FACE AND DOOR EDGE.

### SL52

- Half mortise hinge
- Narrow frame
- Door edge protector
- Flush mounted (no door inset)
- For 1-3/4" doors
- Grade 1




Model #	83" / 85"	95"	120"
SL52 CL HD600	291	351	559
SL52 BR HD600	362	434	734

## FULL SURFACE

SURFACE MOUNT ON FACE OF EXISTING OR NEW DOOR AND FRAME. Ideal for renovation/retrofit or new construction.

### SL21

- Full surface hinge
- Swing-clear action
- Tamper-resistant, removable door leaf cover
- 1/32" door inset
- For 2" to 2-1/4" doors, request long barrel nuts
- Grade 1



Model #	83" / 85"	95"	120"
SL21 CL HD300	239	286	-
SL21 CL HD600	291	341	607
SL21 BR HD300	297	371	-
SL21 BR HD600	332	416	680

### SL57

- Full surface hinge
- Center pivot
- Narrow frame
- Tamper-resistant, removable door leaf cover
- 1/16" door inset
- For 2" to 2-1/4" doors, request long barrel nuts
- Grade 1



Model #	83"	85"	95"	120"
SL57 CL HD300	233	233	286	-
SL57 CL HD600	288	288	341	608
SL57 BR HD300	297	297	370	-
SL57 BR HD600	332	332	415	681
SL57 BK HD600	349	-	437	716

NOTE: Custom lengths are available and require handing, except SL11, SL27, SL38, SL40 and SL60/62.

Send quote requests and purchase orders to [customerservice@select-hinges.com](mailto:customerservice@select-hinges.com)



## PART NUMBER INTERCHANGE

SELECT MODELS	NGP	ROTON	PEMKO	STANLEY	ABH	PBB	IVES
SL11 HD300		780-112	FMSLF/KFM	661			
SL11 HD600	HD1100	780-112HD	FMSLFHD/KFMHD	661HD	A110HD	CG31	112HD/112XY
SL11 LL	HD1100-LL	780-112LL			A110LL		
SL12 HD600							
SL14 HD300							
SL14 HD600	HD1400	780-124HD		669HD			114XY
SL18 HD300		780-111	FMSLI		A111HD		
SL18 HD600	HD1800	780-111HD	FMSLIHD	671HD	A120HD	CG31I	
SL18 LL	HD1800-LL	780-111LL		671HDLL	A120LL		
SL21 HD300		780-210	FS				
SL21 HD600	HD2100	780-210HD	FSHD	665HD	A210HD	CG33C	210XY**
SL24 HD300		780-224	FM				
SL24 HD600	HD2400	780-224HD	FMHD	662HD	A240HD	CH31	224HD/224XY
SL24 LL	HD2400-LL	780-224LL		662HDLL	A240LL		
SL26 LL				672HDLL	A260LL	CG31PN	026XY
SL27 LL	HD2700-LL	780-226LL		673HDLL	A270LL	CG31P	027XY
SL31 HD600			SPFMSLF				
SL38 HD300		780-110HD					
SL40 HD600		780-235HD	WTFMHD	661HDWT	A110WT		040XY
SL41 HD600	HD4100	780-041HD	OFSM	674HD	A410HD	CG31C	
SL41 LL	HD4100-LL	780-041LL			A410LL		
SL44 HD600			SPFM				
SL48 HD600			SPFMSLI				
SL52 HD600			HMHD				
SL53 HD600	HD5300	780-053HD		679HD	A530HD	CG34N	053XY**
SL54 HD600	HD5400	780-054HD	HSHD	663HD	A540HD	CG34	054XY**
SL57 HD300		780-157	FSCP	664			
SL57 HD600	HD5700	780-157HD	FSCPHD	664HD	A570HD	CG33N	157XY**
SL71 HD600		780-113HD*	FMSLISFHD*	668HD*	A130HD*		
SL77 HD600		780-155HD	HSSFHD	680HD	550HD		
SL84 HD600							
SL84 LL							
SL60/62							

\* Not equivalent hinge but possible SELECT hinge substitution depending on application.

\*\* Compatible with inset & profile.

☐ No equivalent hinge available from this manufacturer.

### Custom Designed Continuous Hinges

Contact factory for quotations or special-design continuous hinges

[CustomerService@Select-Hinges.com](mailto:CustomerService@Select-Hinges.com)

# Pin & Barrel Continuous Hinge Product Selection

SELECT offers Pin & Barrel Continuous Hinges for those customers who sometimes require hinges made of steel or stainless steel. SELECT Products Limited remains focused on providing you the highest quality products, superior service, and consistently shipping your orders within 48 hours. Large volume orders may require longer lead times.

## PIN & BARREL HINGES IN STOCK

- **Lengths** 79" / 83" / 85" / 95" / 119"  
SELECT hinges are normally 1" shorter than actual opening height. Custom lengths can be ordered (see page 14).
- **Hinge Duty** All SELECT brand Pin & Barrel Continuous Hinges (excluding SL3500 and Toilet Partition models) are designed for 1-3/4" doors, medium-frequency up to 400 lb. or low-frequency up to 600 lb. (4 ft. maximum door width).
- **Finishes** US32D Satin finish is standard on all stainless steel hinges. Standard aluminum hinges have a bright dipped anodized finish. Custom finishes, including painted and polished, are available (see page 14).

## STANDARD ORDERS

- **Shipping** 48 hours or less ARO for standard products. Large quantities and custom processing may require additional time.
- **Terms** Net 30 days.
- **Freight** Net amounts of \$1,800 or more: Prepaid and allowed, routing of our choice. (48 contiguous states and Canada only.) Net amounts less than \$1,800: Freight costs are prepaid and added. (48 contiguous states and Canada only.)
- **Special Shipments** Oversized shipments (greater than 95" long) will ship via FedEx 3-Day or truck only. Additional fees may apply to orders shipped outside the 48 contiguous states, special packaging and advance notification requests. Please consult with SELECT.

## FIRE-RATED PIN & BARREL HINGES


- **UL® Labeled Fire Rating** The following SELECT Pin & Barrel Continuous Hinges have been tested by Underwriters Laboratories, Inc. to meet the Positive pressure requirements of UBC 7.2 and are listed by Underwriters Laboratories, Inc. to U.S. and Canadian safety standards:



**Models SL300, SL302, SL303, SL305, SL306, SL308, SL309, SL310, SL311, SL315 and SL3500** for use on single-mounted doors, up to 3 hours for hollow metal doors, 1-1/2 hours for hollow metal and composite core wood fire doors, and 20 minutes for wood doors.

## DUST-FREE (MEDICAL) BEARINGS

- **Dust-Free (Medical)** flanged double bearings are standard



on all SELECT Pin & Barrel continuous hinges except Toilet Partition hinges.

- Prevent metal-to-metal contact for longer hinge life.
- Eliminate dust for "clean room" applications.

## PART NUMBER INTERCHANGE

SELECT MODELS	MARKAR	HAGER	PEMKO	MCKINNEY	STANLEY	ABH	IVES
SL300	FM-300	790-900	SPBFM	MCK FM300	651	A500	700
SL302	FS-302		SPBFS	MCK FS302	657	A502	702
SL303	HS-303	790-903	SPBHS	MCK HS303		A503	
SL305	HG-305	790-905	SPBFMDEG	MCK HG305	652	A505	705
SL306	HG-306	790-906		MCK HG306	655	A506	
SL308	EG-308		SDEG		EG2/2B	A528F	
SL309	FS/SC-309	790-909	SPBFSSC	MCK FS309			
SL310	HG-310			MCK HG310			
SL311	HG-311			MCK HG311	656	A511	711
SL315	HG-315		SPBFMEG				
SL3500	FM-3500		SPBFMHD				
SL402TP	FS-402-TP						
SL902TP	FS-902-TP						

☐ No equivalent hinge available from this manufacturer.

Lead times may vary depending on the number of hinges to be custom prepared. Please contact SELECT for verification of the lead time required. Changes or cancellations on custom processed orders are subject to charges for work already performed and materials utilized.

## ELECTRICAL MODIFICATIONS


No discounts apply to net add items. Specify prep locations from top of hinge. See SELECT catalog for specific prep locations. Hanging required for all electrical modifications. Hinges prepared with electrical modifications are non-returnable.

- **Current Transfer Prep [CTP]**  
Hinge leaf cutout for EPT. Standard location is centerline. Provide location for all non-standard locations Hanging required. Additional cost on the SL305 or SL310.  
**AR-CTP (Adams-Rite)** ..... \$88\* net add per CTP  
\*On the SL305 or SL310 ..... \$99 net add per CTP  
**VD-CTP (Von Duprin)** ..... \$88\* net add per CTP  
\*On the SL305 or SL310 ..... \$99 net add per CTP
- **Concealed Current Transfer [EL]** 28 gauge wires.  
**EL-4 (4-wire)** ..... \$330 net add per EL  
**EL-8 (8-wire)** ..... \$391 net add per EL  
**EL-12 (12-wire)** ..... \$448 net add per EL
- **Adjustable Concealed Monitor Switch [AMS]**  
Rigid welded assembly allows monitoring switch adjustments for all applications.  
**AMS** ..... Contact SELECT for quote
- **Electrical Transfer Access Prep [ETAP]** Access panel in both hinge leaves allows access to electrical wiring without removing door or hinge.  
**ETAP** ..... \$138 net add per ETAP

## STANDARD FASTENERS

All SELECT Pin & Barrel Continuous Hinges and edge guards are shipped with a corresponding screw pack unless requested otherwise.

## OPTIONAL FASTENERS

- **Adjusta-Screw™ [AS]** ..... \$47 net add per hinge  
Designed to correct frame fit variances up to 3/8". Right-hand thread. Optional on models SL305, SL308 and SL310.
- 
- **Security Fasteners [SF]**  
Tamper-resistant spanner head and Torx® head fasteners are available (at extra cost) to replace standard fasteners for added entryway security.  
**Thread-forming [SF]** ..... \$46 net add per hinge  
**Self-drilling, thread-forming [SF TEK]** \$94 net add per hinge

## CUSTOM PROCESSING

No discounts apply to net add items. Hanging required for all custom processing. Hinges prepared with custom processing are non-returnable.

- **Dutch Door [DD]** ..... \$73 net add per hinge  
Frame leaf is furnished as a continuous length. Door leaf is cut to fit the specified Dutch Door height. Required: Hanging and measurements for net hinge length, top door leaf length, bottom door leaf length and clearance (3/16" min.) between top and bottom leaves.
- **Hospital Tip [HT]** ..... \$65 net add per hinge  
Hinges can be prepared with slanted tips for hospitals and correctional facility applications. Hanging required. Available only on SL300, SL305 and SL315.
- **Wide Throw [WT]** ..... Contact SELECT for quote  
Specify leaf width from pin centerline when ordering. Engineering drawing required.
- **Automatic Door Bottom Cut [ADBC]** . . \$59 net add per ADBC
- **Raised Barrel [RB]** ..... \$51 net add per hinge  
Swaged door leaf for Concealed and Half Surface hinges allows door to open 180°. Hanging required.
- **Security Studs** Stainless steel studs are mounted to frame leaf, door leaf is drilled to accommodate studs. 3 studs are required for hinge lengths up to 85", 4 studs are required for hinges longer than 85". Hanging required. Door and frame must be specially prepared to accommodate security studs.  
**[SECSTUD3]** ..... \$97 net add per hinge  
**[SECSTUD4]** ..... \$135 net add per hinge
- **Sheared Leaf [SHFL]** ..... Contact SELECT for quote  
Used for narrower door thicknesses, unevenly rabbeted frames or other special applications. Specify leaf width from pin centerline when ordering.
- **Blank Hinge [B]** ..... \$76 net add per hinge  
Holes are omitted for welded installations.
- **LL Cover [LLCVR]** ..... \$416 net add per cover  
Lead-lined cover for applications requiring radiation containment. Available only on surface-mounted hinges.
- **LL Astragal [LLAST]** ..... Contact SELECT for quote  
Lead-lined astragal for SL308 edge guard.
- **Cutting Charge [CUTCHG]** ..... \$54 net add per cut
- **Paint, Powder Coat [PAINTPC]** . . . Contact SELECT for quote  
Scratch-resistant, 7 standard colors. Lead time 4 weeks min.
- **Paint, Kynar [PAINTKY]** ..... Contact SELECT for quote  
Available only on aluminum hinges. Lead time 4 weeks min.
- **Edge Guard Preps [EG]** ..... \$43 net add per prep  
SL308 edge guard can be prepared for: 161 latch bolt; 86 mortise lock; ASA strike; 161 strike; manual flush bolts; auto flush bolts.
- **Engineered To Order Hinge [ETO]** Contact SELECT for quote




# Pin & Barrel Continuous Hinge Models

## CONCEALED

**CONCEALED EDGE MOUNT** on 1-3/4" doors up to 600 lb. (max. 48" door width). No mortise required.  
For new construction or renovation/retrofit.

### SL300

- Concealed hinge
- Stainless steel
- 1/8" door inset



Model #	79" / 83"	85"	95"	119"
SL300	644	713	764	1,061

### SL305

- Concealed hinge
- Stainless steel
- Door guard
- Universal Adjusta-Screw™ fasteners (right-hand thread) available at extra cost (see page 14)



Model #	79" / 83"	85" / 95"	119"
SL305	1,003	1,106	1,504

### SL315


- Concealed hinge
- Stainless steel
- Edge guard



Model #	79" / 83"	85" / 95"	119"
SL315	814	916	1,316

### SL3500

- Concealed hinge
- Extra heavy-duty 12 gauge stainless steel
- Meets ASTM F-1450A Abuse Test requirements
- Hospital Tip standard
- Torx® head security fasteners available at extra cost (see page 14)
- For 1-3/4" to 2-1/4" doors up to 4 ft. wide and weighing up to 900 lb.
- 1/8" door inset



Model #	79" / 83"	85" / 95"	119"
SL3500	1,061	1,262	1,618

#### BHMA CERTIFIED — Cycle Requirements per BHMA Standard ANSI / BHMA A156.26 Grade 1

SELECT Pin & Barrel Continuous Hinges SL300, SL302, SL303, SL305, SL306, SL309, SL310, SL311, SL315 and SL3500 are BHMA CERTIFIED to conform to BHMA Standard ANSI/BHMA A156.26 Grade 1.

Send quote requests and purchase orders to [customerservice@select-hinges.com](mailto:customerservice@select-hinges.com)

# Pin & Barrel Continuous Hinge Models


## FULL SURFACE

### SURFACE MOUNT ON FACE OF EXISTING OR NEW DOOR AND FRAME

Suitable for renovation/retrofit or new construction. For 1-3/4" doors weighing up to 600 lb. (max. 48" door width).

#### SL302


- Full surface hinge
- Stainless steel
- Center pivot
- Tamper-resistant leaf covers
- Flush mounted
- Through-bolts for wood doors available at extra cost



Model #	79" / 83"	85" / 95"	119"
SL302	844	1,010	1,404

#### SL309

- Full surface hinge
- Stainless steel
- Swing-clear action
- Tamper-resistant door leaf cover
- 1/8" door inset
- Through-bolts for wood doors available at extra cost



Model #	79" / 83"	85" / 95"	119"
SL309	935	1,083	1,360


## HALF SURFACE • HALF MORTISE

### HALF SURFACE OR HALF MORTISE MOUNT applicable for renovation/retrofit or new construction.

For 1-3/4" doors weighing up to 600 lb. (max. 48" door width).

#### SL303


- Half surface hinge
- Stainless steel
- Tamper-resistant door leaf cover
- 1/8" door inset
- Through-bolts for wood doors available at extra cost



Model #	79" / 83"	85" / 95"	119"
SL303	774	900	1,299

#### SL306

- Half mortise hinge
- Stainless steel
- Tamper-resistant frame leaf cover
- Edge guard



Model #	79" / 83"	85" / 95"	119"
SL306	784	932	1,166

Send quote requests and purchase orders to [customerservice@select-hinges.com](mailto:customerservice@select-hinges.com)


# Pin & Barrel Continuous Hinge Models

## SWING CLEAR

SWING-CLEAR ACTION provides maximum clearance for operating room and similar 1-3/4" doors up to 600 lb. (max. 48" door width).

### SL310


- Swing-clear action
- Stainless steel
- Door guard
- Universal Adjusta-Screw™ fasteners (right-hand thread) available at extra cost (see page 14)



Model #	79" / 83"	85" / 95"	119"
SL310	1,380	1,407	2,012

### SL311

- Swing-clear action
- Stainless steel
- Edge guard




Model #	79" / 83"	85" / 95"	119"
SL311	1,161	1,188	1,687

## EDGE GUARD

### SL308

- Edge guard
- Stainless steel
- Lock-side door edge protector
- Can reduce gap between pairs of doors
- Universal Adjusta-Screw™ fasteners (right-hand thread) available at extra cost (see page 14)
- Specify square or beveled door edge



Model #	79" / 83"	85" / 95"	119"
SL308	412	463	587

Send quote requests and purchase orders to [customerservice@select-hinges.com](mailto:customerservice@select-hinges.com)



# Toilet Partition Continuous Hinge Models

## GEARED

### SL60/SL62 GEARED

- Full surface toilet partition hinges
- Clear anodized aluminum
- For doors 36" wide (max.) weighing up to 80 lb.
- One-way fasteners: specify for partitions of 3/4", 1" or 1-1/4"
- SL60: Grade 1




Model #	57"	Swing Angle
SL60	203	Opens 180°
SL62	263	Opens 120°, spring-loaded

## PIN & BARREL

### SL402TP PIN & BARREL


- Full surface toilet partition hinge
- Clear anodized aluminum
- Spring-loaded; adjustable
- Tamper-resistant Torx® head end caps
- For doors weighing up to 80 lb.; consult factory for doors wider than 36"



Model #	54"
SL402TP	728

### SL902TP PIN & BARREL

- Full surface toilet partition hinge
- Stainless steel
- Spring-loaded; adjustable
- Tamper-resistant Torx® head end caps
- For doors weighing up to 80 lb.; consult factory for doors wider than 36"



Model #	54"	57"
SL902TP	808	837

Send quote requests and purchase orders to [customerservice@select-hinges.com](mailto:customerservice@select-hinges.com)

# Product Warranties and Ordering Information

## WARRANTIES

### Geared Hinges

SELECT Products Limited will replace your SELECT Geared Continuous Hinge if it ever fails under normal use, as long as it was installed in accordance with the installation instructions enclosed with every new SELECT hinge.

- SELECT Products Limited warrants its Geared Continuous Hinges to be free from defects in material or workmanship.
- This warranty is continuous and has no time limit.
- The durability delivered by SELECT Hinges' Pair-Matched™ hinge leaves, lifetime lubrication and anodizing after machining has been proven in independent performance testing surpassing 25,000,000 cycles. Learn more at [selecthinges.com/cycletest](http://selecthinges.com/cycletest).

**The following actions will void any warranty, expressed or implied:**

- Failure to install the hinge according to manufacturer's specifications and requirements. For more information, visit [selecthingerequirements.com](http://selecthingerequirements.com).
- Use of fasteners other than those supplied with the hinge.
- Unauthorized field modifications, including alteration or removal of the factory-applied lubricant, altering the original finish or painting the hinge.
- Failure to follow factory-specified cutting instructions when cutting the hinge in the field.

*SELECT Products Limited makes no other warranty or guarantee, either expressed or implied.*

### Pin & Barrel Hinges

SELECT brand Pin & Barrel Continuous Hinges are guaranteed to be free of defects in material and workmanship for a period of 25 years.

**The following actions will void any warranty, expressed or implied:**

- Failure to install the hinge according to manufacturer's specifications and requirements. For more information, visit [selecthingerequirements.com](http://selecthingerequirements.com).
- Use of fasteners other than those supplied with the hinge.
- Unauthorized field modifications, including alteration or removal of the factory-applied lubricant, altering the original finish or painting the hinge.
- Failure to follow factory-specified cutting instructions when cutting the hinge in the field.

*SELECT Products Limited makes no other warranty or guarantee, either expressed or implied.*

## Electrical Components

### GEARED HINGES

All electrical components on SELECT Geared Continuous Hinges have a 5-year warranty, *with the exception of the Accessible Through-Wire components and hinges with AP or RP preps*.

- The Accessible Through-Wire (ATW) components are warrantied for 6 years.
- The Accessible Through-Wire Removable Panel (ATWRP) and the Accessible Through-Wire Adaptor (ATWADPT) components are not covered by a warranty.
- All electrical components on hinges modified with AP (Accessible Panel) or RP (Removable Panel) preps are warrantied for 2 years.

### PIN & BARREL HINGES

Electrical modification components on SELECT Pin & Barrel Continuous Hinges have a 5-year warranty.

## PAYMENT TERMS

Terms are net 30 days from the date of invoice, following credit approval. No C.O.D. orders will be accepted. Interest of 1.5% per month will accrue on any charges unpaid after 30 days from the date of invoice. Shipment will be held on subsequent open orders on accounts unpaid after 45 days from date of invoice until payment is received in full. Once payment of all outstanding 45-day+ invoices is received in full by SELECT, the order will be placed into production (if custom) and/or shipped (if stock items). Accounts unpaid after 90 days will automatically be subject to CIA terms on subsequent open orders.

Applicable Federal, State or local taxes are not included in the prices quoted. Should any license fee, property, sales, use or excise tax be levied or assessed by the Federal, State or local law upon any goods which are the subject matter of the price list, they shall constitute an extra and shall be paid by the buyer. If a surety bond is required in connection with a contract to furnish these goods, the premium shall be added to the contract.

## CANCELLATIONS

Changes or cancellations on custom orders, including Fire-Rated products, will be subject to charges for work already completed and materials utilized.

## PARTIAL SHIPMENTS

Partial shipments may be made on open orders to expedite delivery. Partial or multiple drop shipment requests subsequent to originally quoted and/or acknowledged orders may be subject to re-pricing and re-assessed for freight charges. Partial shipments will be invoiced at the time of shipment and will be payable individually, including freight if applicable, under the terms stated above.

## RETURN OF GOODS/FREIGHT DAMAGE

SELECT Products Limited's restocking fee is 35%. Any refund given will be in the form of credit to be used for future purchases. **Only stock hinges without modifications are eligible for return.** Hinges with custom colors, special lengths, cutouts, electrical preps or other custom processing cannot be returned.

SELECT qualifies freight carriers based on their ability to deliver in a safe, timely and cost effective manner. All claims made for freight-damaged goods must be signed for as damaged at the time of delivery. "Authorized shipment release" deliveries are the consignee's sole responsibility. SELECT is not responsible for any damaged product accepted without signed paperwork. SELECT is not responsible for damage caused by carriers not approved by SELECT.

## SHIPPING



SELECT ships 99% of hinge orders in 48 hours—and most of those in 24 hours. Unusually large quantities or custom processing may require additional time.


## AMERICAN-MADE



Every SELECT Geared Continuous Hinge is manufactured in the United States and complies with the Buy American provision, section 1605, of the Recovery Act.



COMSENSE INC.

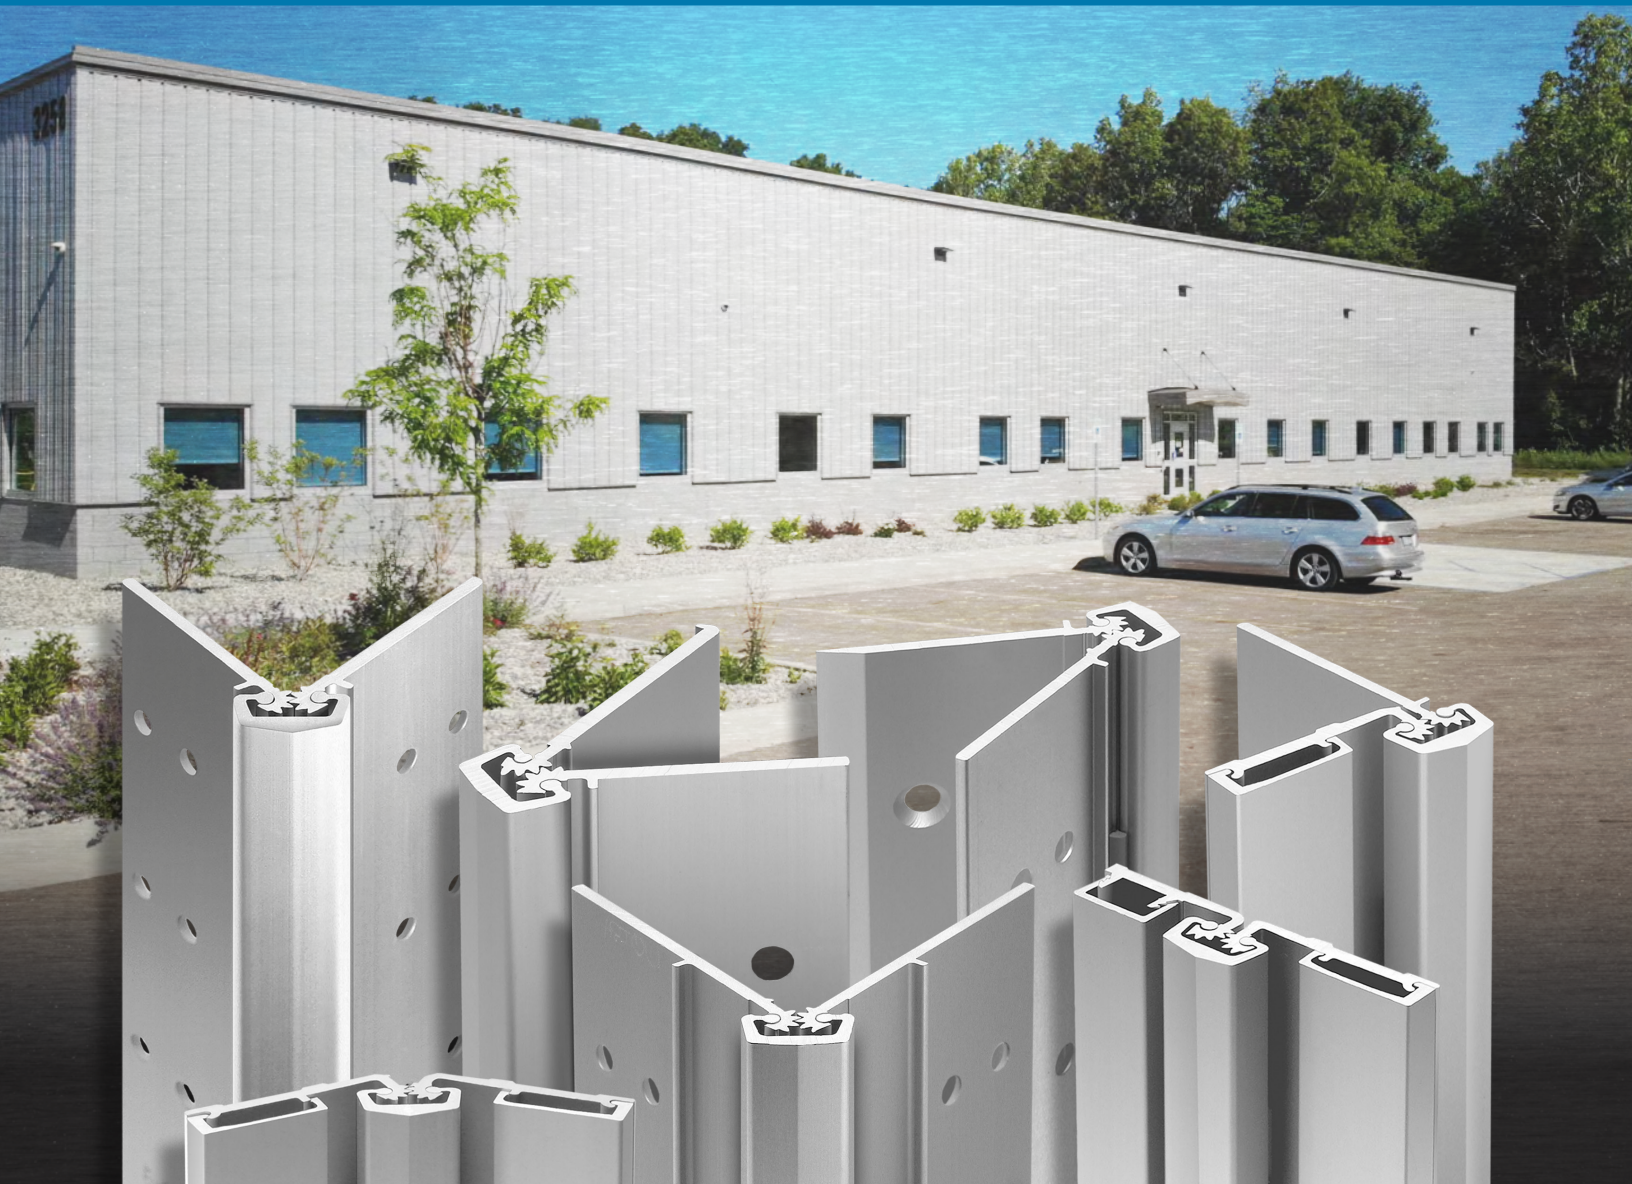

**SELECT  
HINGES®**

SELECT Products Limited

3258 Stadium Park Way, Kalamazoo, MI 49009 | Ph: 800.423.1174 | Fax: 800.423.7107

© 2025 SELECT Products Limited Printed in U.S.A. #PR-040725



**Select-Hinges.com**  
**800-423-1174**

